

manual loading vertical-horizontal inclinable packaging machine

Attracts you with its simplicity. Up to 30 packs/min. Activated by a pedal or by double push buttons.

>> general features

Activated by a pedal or by double push buttons. Vertical inclination from 0 to 80 can be changed thanks to a simple hand wheel. Different inclination change the falling speed of the product enabling the machine to work in both horizontal and vertical position depending of the products. Any products from the fruit and vegetables to the bread, to the sweets, to the seafood/dairy products, cold meats, food or non-food products, like small fittings, small profiles; single products or multiple products.

>> specific features

The Forming tunnel of the machine is easily adjustable allowing to pack a wide range and sizes of products thanks also to the wide film reel: Up to 680 mm width. Film can be any different kind of polypropylene, polyolefin, perforated bakery film. The packaging is made thanks to a two couples of driven and sealing wheels underneath and a mechanic sealing bar. Same components ISO certificated as our standard packaging machines. All components in contact with the products are in stainless steel.


>> details




An adjustable tunnel allows the packaging of a lot of different kind of products with wide range of measures.



Motorized Sealing Bar for different films.

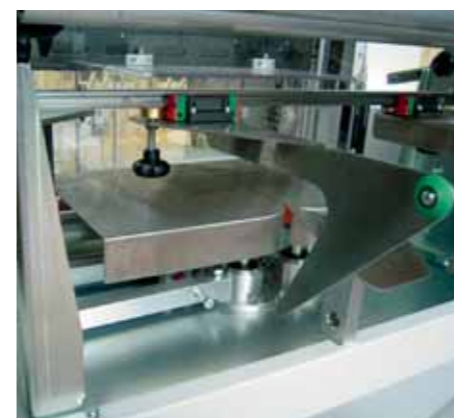

Adjustable Bag size. Movements on linear guides.

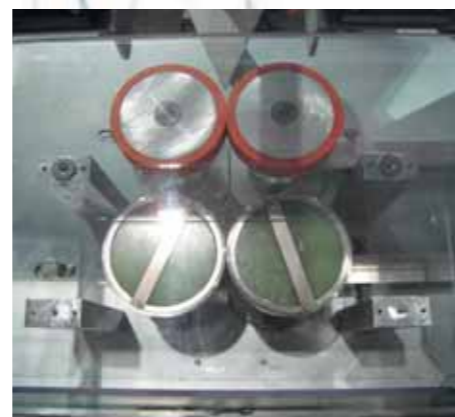

Sealing wheels and film tensioning .Rotary pulling and sealing wheels.



Stainless steel version is available.



Inclinable working level from 0° to 90°.



Machine can optionally be equipped with an in feed loading pipe for easy products loading.



Precise product's detection thanks to barrier photocell.



High quality ISO certificated components.


ZED/10/2014 - rettangolare.it

PREFERRED PACKAGING ITALY
leader in the manufacturing packaging equipment

**DM
PACK**

>> **ZED**

manual flowpack inclinable machine

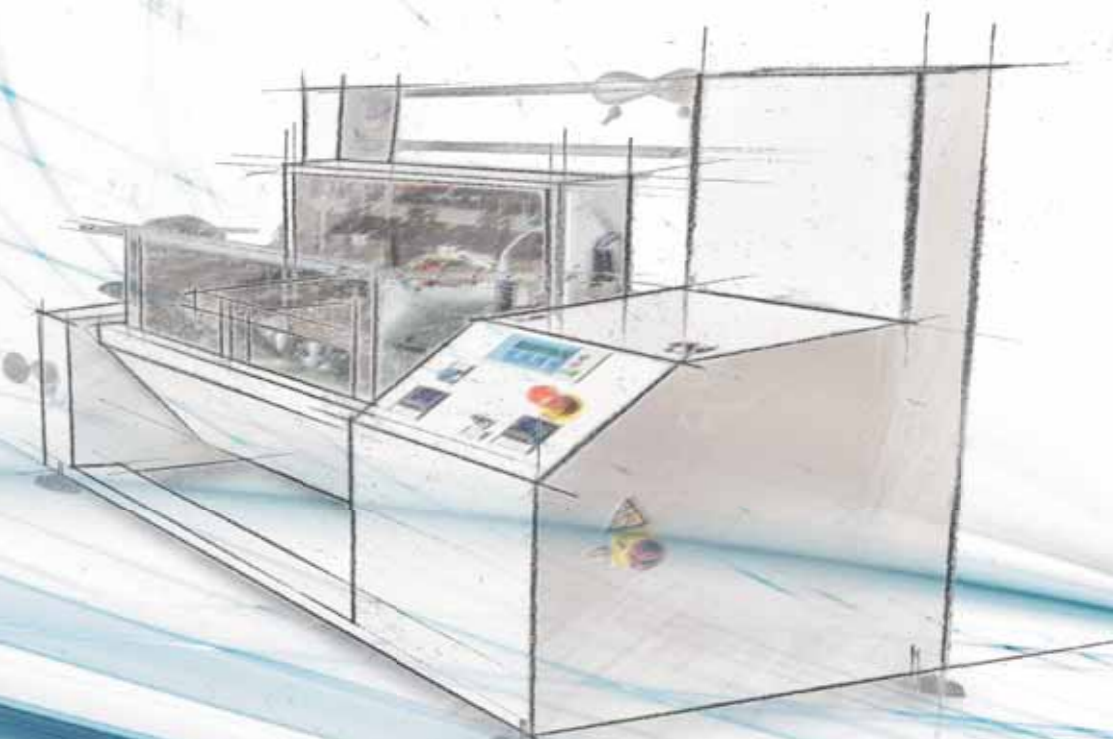

GB

ZED

manual flowpack inclinable machine



>> Inclinable from 0° to 90°.



>> Small & Flexible. Easy to be adjusted. Works in "manual" mode by the pedal or buttons activation or in "automatic" mode thanks to the product's detection. Siemens controller.

>> technical features

Film reel width	max 680 mm
Transversal sealing jaw width	400 mm
Max product's height	150 mm
Max speed	30 pack per minute
Electric power	2 Kw
Electric supply	400 v 3 ph+n+t
Machine size (LxWxH mm)	1250 x1250x1700
Weigh	270 Kg

>> All components in contact with products are stainless steel. Available stainless steel version.